



**DESCRIPTION:** 3W 3KVDC Isolated Single Output DC/DC Converters

The PPG-3W series are miniature, isolated 3W DC/DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution. The Internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 3KVDC isolation.

### FEATURES

RoHS compliant, CE certification	Efficiency from 81% to 88%	Operating temperature: -40°C to 105°C
UL 94V-0 package material	Industry standard pinout	3KVDC isolation
Input voltage: 3.3V, 5V, 12V, 15V, 24V, 48V	Output voltage: 3.3V, 5V, 9V, 12V, 15V, 24V	Internal SMD construction

### SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current(Max./Min)	Load Regulation (Max)	Efficiency (Typ.)
	V	V	mA	%	%
PPG0305S-3W	3.3	5	600/60	11	76
PPG0503S-3W	5	3.3	909/90.9	12	73
PPG0505S-3W	5	5	600/60	11	76
PPG0509S-3W	5	9	333/33.3	10	78
PPG0512S-3W	5	12	250/25	10	80
PPG0515S-3W	5	15	200/20	9	81
PPG0524S-3W	5	24	125/12.5	9	82
PPG1203S-3W	12	3.3	909/90.9	12	73
PPG1205S-3W	12	5	600/60	11	76
PPG1209S-3W	12	9	333/33.3	10	78
PPG1212S-3W	12	12	250/25	10	80
PPG1215S-3W	12	15	200/20	9	81
PPG1224S-3W	12	24	125/12.5	9	82
PPG1505S-3W	15	5	600/60	11	76
PPG1515S-3W	15	15	200/20	9	81
PPG2403S-3W	24	3.3	909/90.9	12	73
PPG2405S-3W	24	5	600/60	11	76
PPG2409S-3W	24	9	333/33.3	10	78
PPG2412S-3W	24	12	250/25	10	80
PPG2415S-3W	24	15	200/20	9	81
PPG2424S-3W	24	24	125/12.5	9	82
PPG4805S-3W	48	5	600/60	11	76
PPG4812S-3W	48	12	250/25	10	80

Add suffix "P" for continuous short circuit protection, for example PPG0505SP-3W.

### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency			65		kHz

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	3.3V input types	2.9	3.3	3.6	V
Voltage range	5V input types	4.5	5	5.5	V
Voltage range	12V input types	11	12	13.2	V
Voltage range	15V input types	13.4	15	16.4	V
Voltage range	24V input types	21.6	24	26.4	V
Voltage range	48V input types	43	48	53	V
Reflected ripple current			8	15	mA p-p

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA=-40°C to 85°C			3	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN (voltage variation +/-5%)		1.0	1.2	%/%

## ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	3000			VDC
Resistance	Viso= 1000VDC	1			GΩ


## ABSOLUTE MAXIMUM RATINGS

Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	700mW
Input voltage Vin, PPG03	5.5V
Input voltage Vin, PPG05	7V
Input voltage Vin, PPG12	15V
Input voltage Vin, PPG15	18V
Input voltage Vin, PPG24	28V
Input voltage Vin, PPG48	54V


## TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	Derating if the temperature $\geq 85^{\circ}\text{C}$	-40		105	$^{\circ}\text{C}$
Storage		-50		150	$^{\circ}\text{C}$
Case Temperature above ambient	PPG0505-3W			32	$^{\circ}\text{C}$
Case Temperature above ambient	PPG1205-3W			27	$^{\circ}\text{C}$
Case Temperature above ambient	All other output types			25	$^{\circ}\text{C}$
Cooling	Free air convection				

## TEMPERATURE DERATING GRAPHS

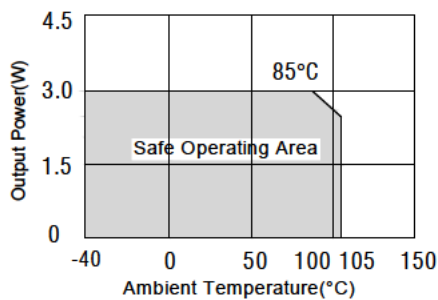


## TOLERANCE ENVELOPES

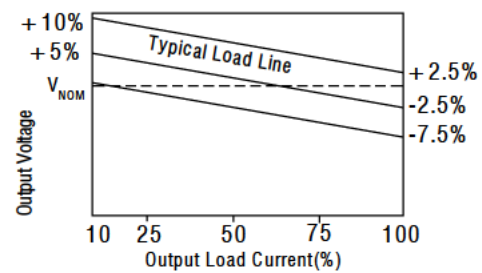


## EFFICIENCY VS LOAD


### TPG 5V Input Voltage

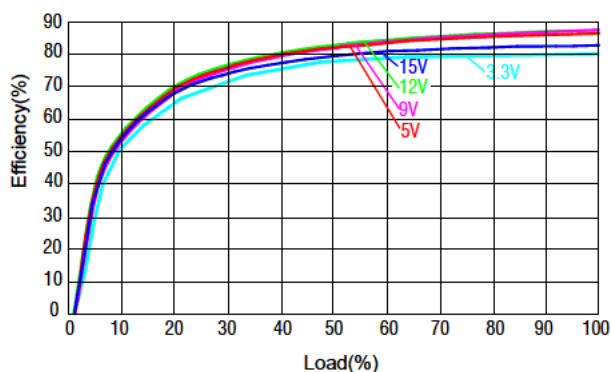

### TPG 12V Input Voltage

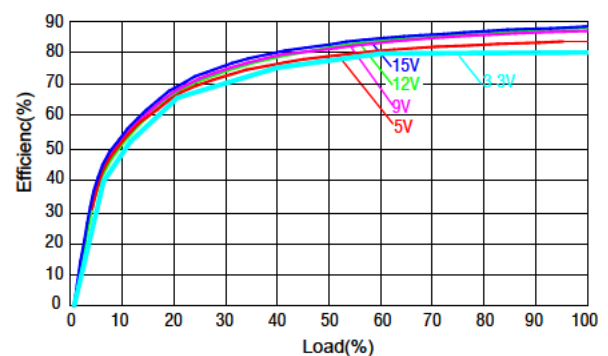

**MECHANICAL DIMENSIONS**

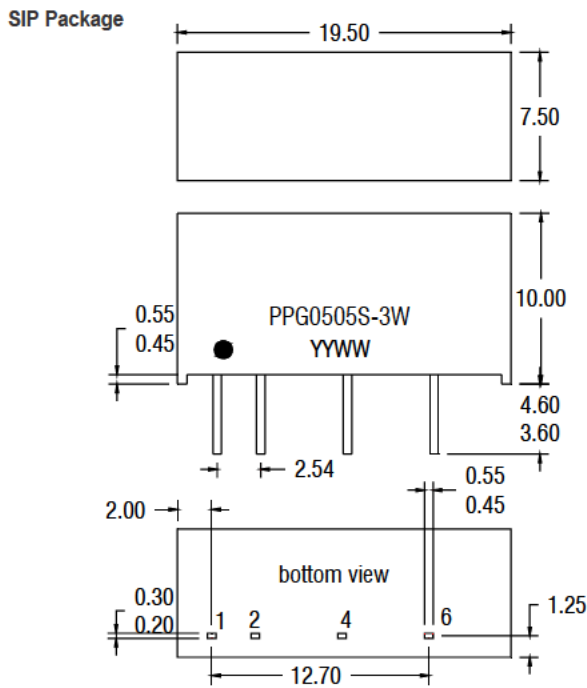


All dimensions in mm  $\pm 0.25$ mm . All pins on a 2.54mm pitch and within  $\pm 0.25$ mm of true position. Weight: 2.8g

**PIN CONNECTIONS**


7 PIN SIP	
Pin	Function
1	+Vin
2	-Vin
4	-Vout
6	+Vout

**RECOMMENDED FOOTPRINT DETAILS**

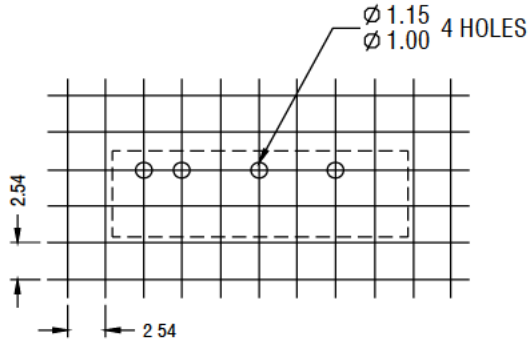

Unless otherwise stated all dimensions in mm  $\pm 0.5$ mm.

**TUBE OUTLINE DIMENSIONS**

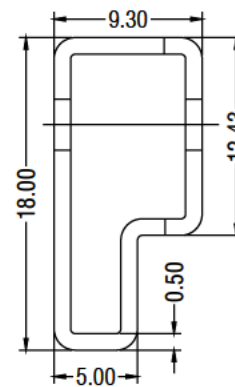

Unless otherwise stated all dimensions in mm  $\pm 0.5$ mm.  
Tube length : 520mm  $\pm 2$ mm. Tube Quantity : 25PCS

**SOLDERING INFORMATION**

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. This series are backward compatible with Sn/Pb soldering systems.