



DESCRIPTION: **3W 1.5KVDC Isolated Single Output DC/DC Converters**

The PPL-3W series are miniature, isolated 3W DC/DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise

FEATURES

RoHS compliant, CE certification	Single isolated output	1.5KVDC isolation
Efficiency up to 86%	Operating temperature: -40°C to 105°C	Power density 2.0W/cm ³
UL 94V-0 package material	Footprint from 1.05cm ²	Industry standard pinout
Input voltage: 5V, 12V, 24V	Output voltage: 3.3V, 5V, 9V, 12V, 15V, 24V	Custom solutions available

SELECTION GUIDE

Part Number	Nominal Input Voltage		Output Voltage	Output Current (Max./Min)	Efficiency
	V		V	mA	%
PPL0503S-3W	5		3.3	909/90.9	80
PPL0505S-3W	5		5	600/60	77
PPL0509S-3W	5		9	333/33.3	80
PPL0512S-3W	5		12	250/25	83
PPL0515S-3W	5		15	200/20	82
PPL1203S-3W	12		3.3	909/90.9	80
PPL1205S-3W	12		5	600/60	80
PPL1209S-3W	12		9	333/33.3	84
PPL1212S-3W	12		12	250/25	86
PPL1215S-3W	12		15	200/20	85
PPL2405S-3W	24		5	600/60	80
PPL2409S-3W	24		9	333/33.3	80
PPL2412S-3W	24		12	250/25	80
PPL2424S-3W	24		24	125/12.5	83

Add suffix "P" for continuous short circuit protection, for example PPL0505SP-3W.

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	5V input variants	4.5	5.0	5.5	V
Voltage range	12V input variants	11	12.0	13.3	V
Voltage range	24V input variants	22	24	26.5	V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Max.	Units
Rated Power	TA= -40°C to 85°C		3.0	W
Voltage Set Point Accuracy	See tolerance envelope			
Line regulation	High VIN to low VIN (voltage variation +/-5%)		1.2	%/%
Load Regulation(10% load to rated load)	3.3V & 5V output variants		9	%
Load Regulation(10% load to rated load)	9V output variants		5	%
Load Regulation(10% load to rated load)	12V output variants		6	%
Load Regulation(10% load to rated load)	15V output variants		9	%
Load Regulation(10% load to rated load)	24V output variants		9	%

ABSOLUTE MAXIMUM RATINGS

Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	800mW
Input voltage Vin, PPL05XX types	7V
Input voltage Vin, PPL12XX types	15V
Input voltage Vin, PPL24XX types	28V

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	1500			VDC
Resistance	$V_{iso} = 500\text{VDC}$	1			$\text{G}\Omega$


GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	5V input		95		kHz
Switching frequency	12V input		95		kHz
Switching frequency	24V input		95		kHz


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	Derating if the temperature $\geq 85^\circ\text{C}$	-40		105	$^\circ\text{C}$
Storage		-50		130	$^\circ\text{C}$
Case Temperature above ambient	5V output types			46	$^\circ\text{C}$
	All other output types			38	$^\circ\text{C}$
Cooling	Free air convection				

TEMPERATURE DERATING GRAPHS

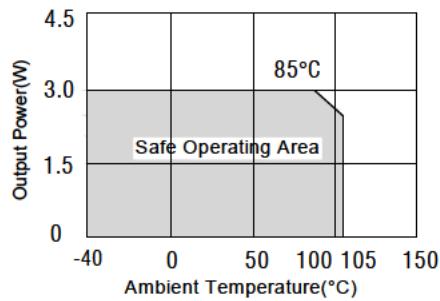


TOLERANCE ENVELOPES

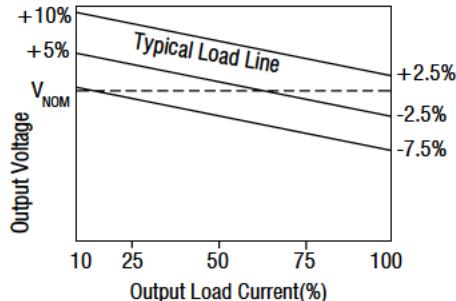

MECHANICAL DIMENSIONS



SIP Package

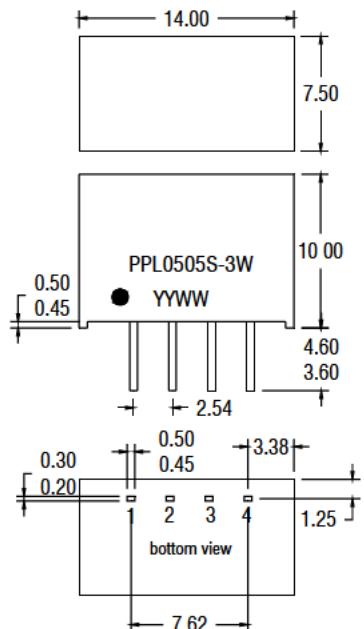

PIN CONNECTIONS

4 PIN SIP	
Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

All dimensions in mm $\pm 0.25\text{mm}$. All pins on a 2.54mm pitch and within $\pm 0.25\text{mm}$ of true position. Weight: 2.0g

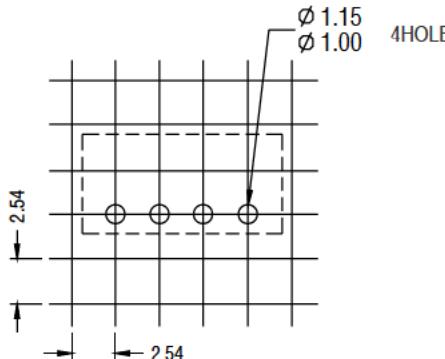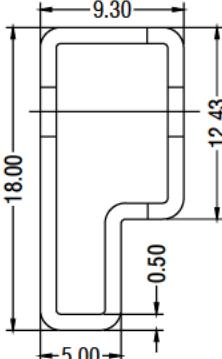RECOMMENDED FOOTPRINT DETAILS	TUBE OUTLINE DIMENSIONS
	
Unless otherwise stated all dimensions mm $\pm 0.5\text{mm}$.	Unless otherwise stated all dimensions in mm $\pm 0.5\text{mm}$. Tube length : 520mm $\pm 2\text{mm}$. Tube Quantity : 35PCS
SOLDERING INFORMATION	
This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The series is backward compatible with Sn/Pb soldering systems	