

THER SK80-8-70

Patron
Passive Elektronik

Thermal Gap Filler Pad


HOW TO ORDER

Patron THER SK80-8-70 XXX-YYY-ZZmm

XXX = width in mm

YYY = depth in mm

ZZ = thickness in mm

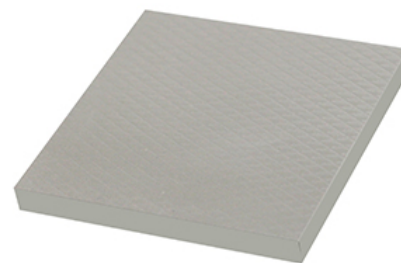

TYPICAL PROPERTIES

ATTRIBUTE	UNITS	SK80	TEST METHOD
Color	/	Grey	Visual
Thermal impedance @1mm/20Psi	°Cin ² /W	0.25	ASTM D5470
Specific Gravity	g/cm ³	3.1	ASTM D792
Volume Resistivity	ΩCM	1.0×10 ¹¹	ASTM D257
Thermal Conductivity	W/mk	8.0	ASTM D5470
Breakdown Voltage	KV/mm	≧8	ASTM D149
Dielectric constant	@1MHz	13.5	ASTM D150
Thickness	mm	0.5~5	ASTM D374
Hardness	Shore 00	70±10	ASTM D2240
Flammability class	/	UL94-VO	UL94
Application temperature	°C	-40 to 150	***
Tape choose	/	√	***
Self-adhesive	/	Double side slightly sticky	***
Fiber strengthen	/	√	***