


THER SK20-2-45

Thermal Gap Filler Pad

HOW TO ORDER

Patron THER SK20-2-45 XXX-YYY-ZZmm
XXX = width in mm
YYY = depth in mm
ZZ = thickness in mm

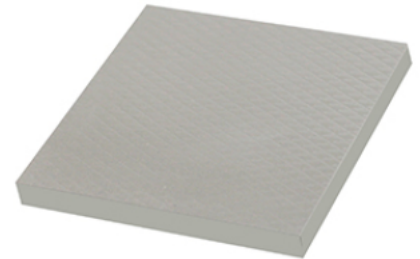

TYPICAL PROPERTIES

ATTRIBUTE	UNITS	SK20	TEST METHOD
Color	/	Gray	Visual
Thermal impedance @1mm/20Psi	°Cin ² /W	0.50	ASTM D5470
Specific Gravity	g/cm ³	2.4	ASTM D792
Volume Resistivity	ΩCM	2.6×10 ¹³	ASTM D257
Thermal Conductivity	W/mk	2.0	ASTM D5470
Breakdown Voltage	KV/mm	≥ 10	ASTM D149
Dielectric constant	@1MHz	6.0	ASTM D150
Thickness	mm	0.2~10	ASTM D374
Hardness	Shore 00	45±10	ASTM D2240
Flammability class	/	UL94-VO	UL94
Application temperature	°C	-50 to +200	***
Tape choose	/	✓	***
Self-adhesive	/	Double side slightly sticky	***
Fiber strengthen	/	✓	***