

# THER SH SERIES


**Patron**  
*Passive Elektronik*

## High Insulated Thermal Conductive Pad

Patron THER SH1500-1,5-80 / SH2000-2,0-80 / SH3000-3,0-80 is a thermal insulator uses fiberglass cloth as a reinforcement material, com-bined with thermal conductive silicon, giving it high thermal conduction and great compression strength. The thermal conductivity is 1.5/2.0/3.0 W/m\*K, the thickness is 0.20~0.45mm. Its high insulation and fiberglass materials increase the strength of its structure making it cut resistant. THER SH1500-1,5-80 / SH2000-2,0-80 / SH3000-3,0-80 is the best choice for high torque screw setting. It functions well with electrical isolative of high power electronic component and the heat sink.

### FEATURES

- / Thermal conductivity: 1.5/2.0/3.0 W/m\*K
- / Excellent insulator
- / Reworkable
- / Fiberglass reinforced

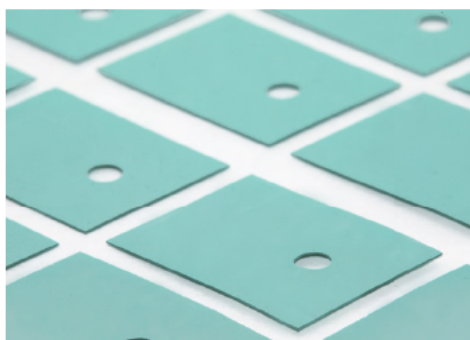

### TYPICAL APPLICATION

- / Power supplies
- / Motor controls
- / EV electric vehicle
- / Automotive electronics
- / 5G base station & infrastructure

### HOW TO ORDER

Patron THER SH SERIES XXX-YYY-ZZmm  
XXX = width in mm  
YYY = depth in mm  
ZZ = thickness in mm

<https://www.patron-components.com/>

### TYPICAL PROPERTIES

PROPERTY	SH1500-1,5-80	SH2000-2,0-80		SH3000-3,0-80			TEST METHOD (UNIT)
Color	Yellow	Green		Pink			Visual
Surface tack 2-side/1-side	2	2		2			-
Reinforced layer	Fiberglass	Fiberglass		Fiberglass			-
Thickness	0.20	0.25	0.30	0.25	0.30	0.45	ASTM D374 (mm)
Density	2.3	2.6	2.6	2.8	2.8	2.8	ASTM D792 (g/cm <sup>3</sup> )
Hardness	80	80	80	80	80	80	ASTM D2240 (Shore A)
Application temperature	-60~180	-60~180	-60~180	-60~180	-60~180	-60~180	- (°C)
ROHS	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	-
ELECTRICAL							
Dielectric breakdown	7	9	10	7	9	12	ASTM D149 (KV)
Surface resistivity	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	ASTM D257 (Ohm)
Volume resistivity	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	>10 <sup>12</sup>	ASTM D257 (Ohm-m)
THERMAL							
Thermal conductivity	1.5	2.0	2.0	3.0	3.0	3.0	ASTM D5470 (W/m*K)
Thermal impedance@20 psi	0.52	0.45	0.53	0.41	0.48	0.56	ASTM D5470 (°C-in <sup>2</sup> / W)
Thermal impedance@60 psi	0.31	0.32	0.38	0.28	0.33	0.40	ASTM D5470 (°C-in <sup>2</sup> / W)
Thermal impedance@100 psi	0.28	0.30	0.36	0.25	0.30	0.38	ASTM D5470 (°C-in <sup>2</sup> / W)