

THER NT94-4-65

Non-Silicone Thermal Conductive RF Absorber Pad

Patron THER NT94-4-65 is a thermally conductive absorber based upon soft magnetic materials dispersed in a non-silicone resin. It has a thermal conductivity of 4.0 W/m*K and dissipates electromagnetic radiation rapidly to mitigate against EMI issues.

FEATURES

/ Thermal conductivity: 4.0 W/m*K /
Excellent absorption characteristics
/ Naturally tacky / Reworkable

TYPICAL APPLICATION

/ IC, CPU, MOS, LED, M/B, Heat sink /
LCD-TV, Notebook PC, PC,
Telecom device, Wireless hub
/ DDR II module, DVD applications,
Hand-set applications
/ 5G base station & infrastructure / EV
electric vehicle


SPECIFICATIONS

/ Sheet form / Die-cut parts

FREQUENCY APPLICATION

2.4 GHz Wi-Fi Router , Bluetooth
3.5 GHz 5G Mobile Networks
5.0 GHz Wi-Fi Router
6.0 GHz Wi-Fi Router
12~18 GHz Low Earth Orbit (LEO)
System 28 GHz 5G Mobile Networks
39 GHz 5G Mobile Networks

Attenuation

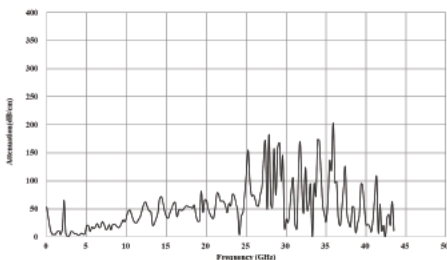

HOW TO ORDER

Patron THER NT94-4-65 XXX-YYY-ZZmm
XXX = width in mm
YYY = depth in mm
ZZ = thickness in mm
<https://www.patron-components.com/>

TYPICAL PROPERTIES

PROPERTY	NT94	TEST METHOD	UNIT
Color	Dark Gray	Visual	-
Surface tack 2-side/1-side	2	-	-
Thickness	0.5~5.0	ASTM D374	mm
Density	3.6	ASTM D792	g/cm ³
Hardness	65	ASTM D2240	Shore OO
Application temperature	-60~125	-	°C
ROHS & REACH	Compliant	-	-
COMPRESSION@1.0mm			
Deflection @10 psi	9	ASTM D5470 modify	%
Deflection @20 psi	25	ASTM D5470 modify	%
Deflection @30 psi	50	ASTM D5470 modify	%
Deflection @40 psi	69	ASTM D5470 modify	%
Deflection @50 psi	80	ASTM D5470 modify	%
EMI Attenuation @1.0mm			
EMI attenuation@ 2.4 GHz	12	ASTM D4935 modify	dB/cm
EMI attenuation@ 3.5 GHz	9	ASTM D4935 modify	dB/cm
EMI attenuation@ 5.0 GHz	22	ASTM D4935 modify	dB/cm
EMI attenuation@ 6.0 GHz	18	ASTM D4935 modify	dB/cm
EMI attenuation@ 12 GHz	47	ASTM D4935 modify	dB/cm
EMI attenuation@ 18 GHz	53	ASTM D4935 modify	dB/cm
EMI attenuation@ 28 GHz	118	ASTM D4935 modify	dB/cm
EMI attenuation@ 39 GHz	49	ASTM D4935 modify	dB/cm
ELECTRICAL			
Surface resistivity	>10 ¹²	ASTM D257	Ohm
Volume resistivity	>10 ¹¹	ASTM D257	Ohm-m
THERMAL			
Thermal Conductivity	4.0	ASTM D5470	W/m*K
Thermal impedance@10 psi	0.463	ASTM D5470	°C-in ² / W
Thermal impedance@20 psi	0.392	ASTM D5470	°C-in ² / W
Thermal impedance@30 psi	0.274	ASTM D5470	°C-in ² / W
Thermal impedance@40 psi	0.184	ASTM D5470	°C-in ² / W
Thermal impedance@50 psi	0.128	ASTM D5470	°C-in ² / W

Thermal Impedance vs. Pressure vs. Deflection

